




### Clearances to Combustibles

|                 |     |
|-----------------|-----|
| Top             | 1"  |
| Flue            | 4"  |
| Access Side     | 18" |
| Non-Access Side | 1"  |
| Bottom          | 1"  |
| Rear            | 18" |

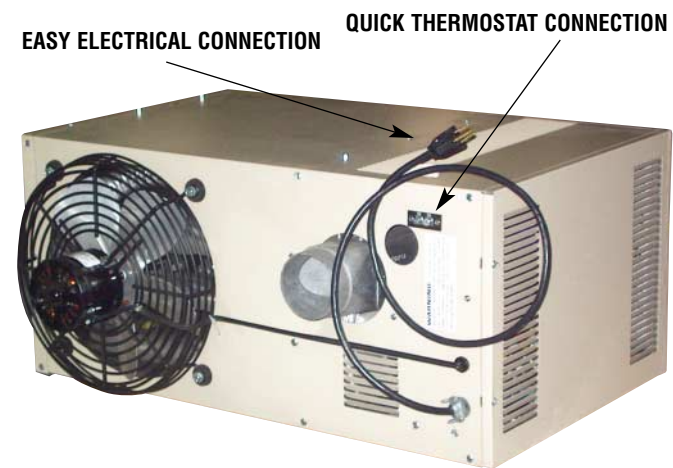


THE CLASSIC COMPACT UNIT-HEATER FOR VERSATILITY, PERFORMANCE AND VALUE.



**ADAMS**  
MANUFACTURING COMPANY

9790 Midwest Ave., Cleveland, Ohio 44125  
Telephone (216) 587-6801  
Fax (216) 587-6807

E-mail: [Adamsx@worldnet.att.net](mailto:Adamsx@worldnet.att.net)

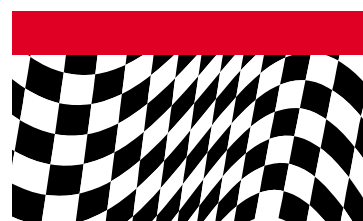


Printed in U.S.A.

Designed specifically for areas with space limitations.

Available in the right size for just about any residential application.

| Unit | Btu/Hr Input | Application                                |
|------|--------------|--|
| GH30 | 30,000       | 1 to 1-1/2 Car Garage                      |
| GH45 | 45,000       | 2 to 2-1/2 Car Garage                      |
| GH60 | 60,000       | 3 to 3-1/2 Car Garage                      |
| GH75 | 75,000       | Large Garage Commercial & Light Industrial |

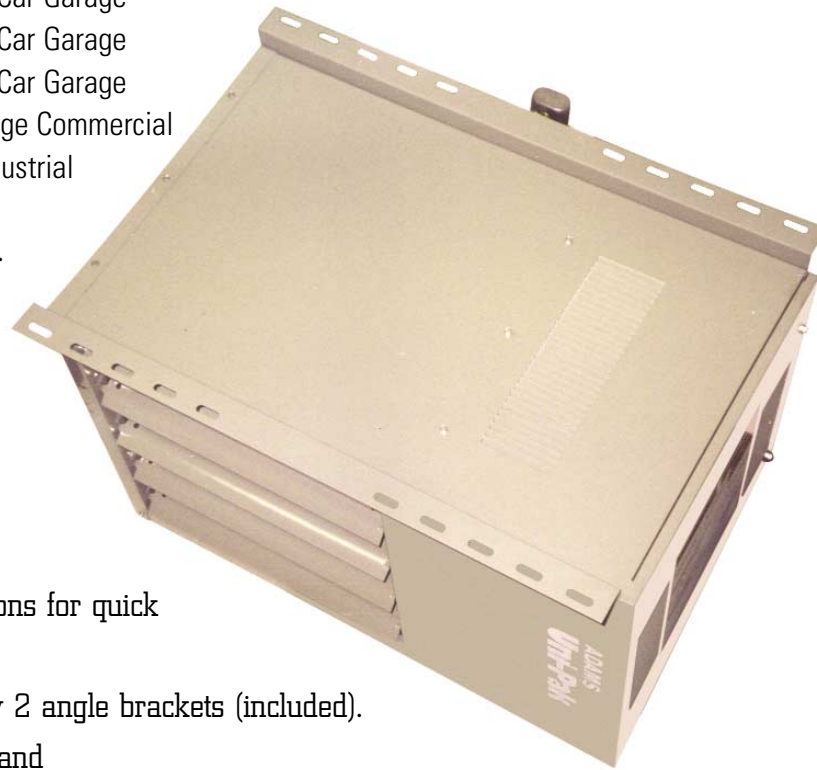


- Certified for residential and commercial applications.
- Designed for natural or LP gases.
- Attractive low-profile design will blend inconspicuously into any garage decor.
- Quiet vibration-free operation.
- Standard power exhaust simplifies side-wall or roof venting with small-diameter vent pipe.
- Installs quickly and easily with field wiring connections for quick access to gas and electricity.
- Lightweight, easily installs from the ceiling with only 2 angle brackets (included).
- Versatile design allows for right or left-hand piping and installation. Gas, electrical and flue connections can be changed from one side to the other by simply flipping the unit over.
- Sealed, permanently-lubricated motor for trouble-free dependability.
- 10-year warranty on heat exchanger.
- Manufactured in the United States.

### Mounting

1" angle, mounting brackets are slotted to accommodate joists on 16" or 24" centerlines.

### Dimensions

Gas-fired unit heaters model GH

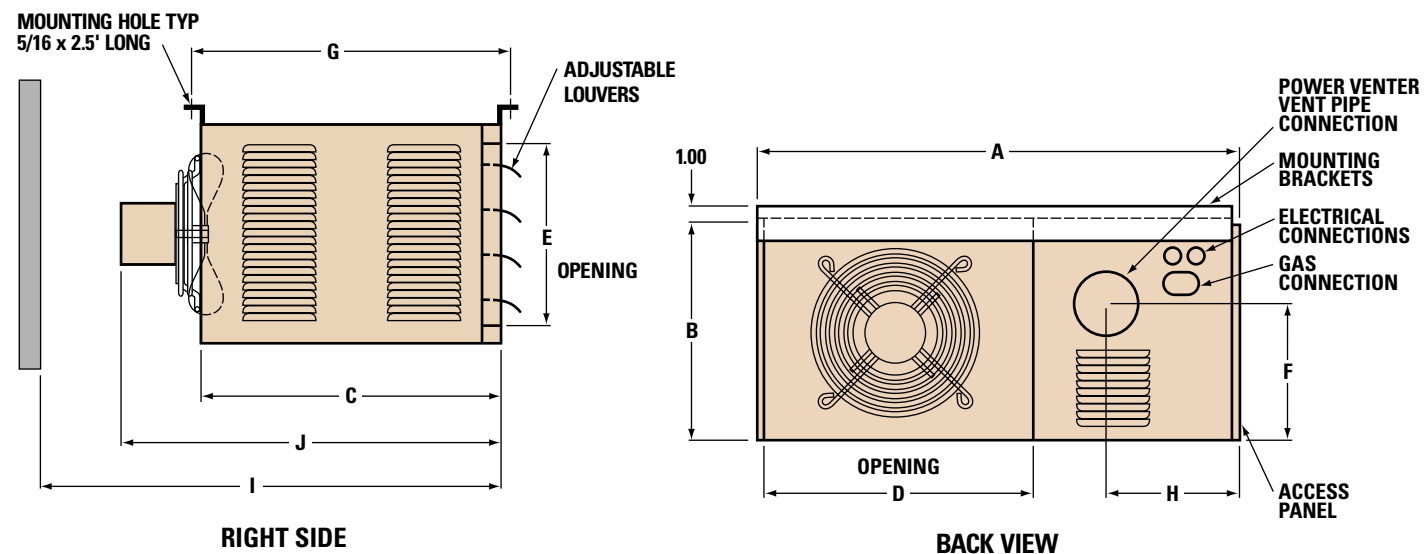

### Performance

| Models                    |      | GH30   | GH45   | GH60   | GH75   |
|---------------------------|------|--------|--------|--------|--------|
| Btu/Hr Input              |      | 30,000 | 45,000 | 60,000 | 75,000 |
| Btu/Hr Output             |      | 24,000 | 36,000 | 48,000 | 60,000 |
| Entering Airflow (CFM)    |      | 505    | 720    | 990    | 1,160  |
| Outlet Velocity           |      | 523    | 749    | 653    | 769    |
| Air Temp. Rise (F°)       |      | 44     | 46     | 45     | 48     |
| Mounting Height (Max ft.) |      | 10     | 10     | 12     | 12     |
| Heat Throw (ft.)          |      | 25     | 27     | 36     | 38     |
| Horsepower                |      | 1/15   | 1/15   | 1/12   | 1/12   |
| Motor                     | RPM  | 1,550  | 1,550  | 1,625  | 1,625  |
| Data                      | Type | S.P.   | S.P.   | P.S.C. | P.S.C. |
|                           | Amps | 1.5    | 2.4    | 1.2    | 1.2    |
| Unit Total Power (Amps)   |      | 2.8    | 3.7    | 2.5    | 2.5    |
| Vent Diameter (in.)       |      | 3      | 3      | 3      | 3      |

### Dimensions (in inches)

| Models                  | GH30   | GH45   | GH60   | GH75   |
|-------------------------|--------|--------|--------|--------|
| A                       | 26.8   | 26.8   | 26.8   | 26.8   |
| B                       | 12.2   | 12.2   | 18.0   | 18.0   |
| C                       | 16.5   | 16.5   | 16.5   | 16.5   |
| D                       | 14.9   | 14.9   | 14.9   | 14.9   |
| E                       | 10.1   | 10.1   | 15.9   | 15.9   |
| F                       | 7.7    | 7.7    | 13.7   | 13.7   |
| G                       | 17.5   | 17.5   | 17.5   | 17.5   |
| H                       | 7.0    | 7.0    | 7.0    | 7.0    |
| Gas.Conn.               | 1/2    | 1/2    | 1/2    | 1/2    |
| I                       | 28     | 28     | 31     | 31     |
| J                       | 22     | 22     | 25     | 25     |
| Fan Diameter            | 10     | 10     | 14     | 14     |
| Approx. Shipping Weight | 55lbs. | 60lbs. | 80lbs. | 85lbs. |



- Ratings shown are for elevations up to 2000 feet above sea level. For elevations above 2000 ft., ratings should be reduced by approximately 4% for each 1000 ft. above sea level.
- Mounting height is measured from the bottom of the unit.
- Heat Throws are calculated at 65°F ambient and unit fired at full rated input. Throws for GH30 and GH45 are based on 8-foot mounting height and at 10-foot heights for GH60 and GH75.