



[Home](#)
 [Kitchen and Bathroom Fans](#)
 [Commercial fans](#)
 [Air Distribution Products](#)
 [PDF Catalogs](#)
 [About Us](#)
 [Contact Us](#)
 [CORPORATE BLOG](#)

[Vitro L](#)

[Z star](#)

[B 4](#)

[B 3](#)

[LD](#)

[X](#)

[X Star](#)

[R](#)

[VKO 1](#)

[VKO](#)

[S](#)

[M](#)

[M 3](#)

[MA](#)

[K](#)

[K 1](#)

[PF](#)

[D](#)

[MAO 1](#)

[MAO 2](#)

[CF](#)

[VN](#)

[Modern](#)

Vents-US / Kitchen and Bathroom Fans / VKO 1

VKO 1

In - line input and extract VKO 1 fans are purposefully designed for mounting at any point within the length of ventilation duct.

Generally they are located within the suspended ceiling space, which ensures very quiet operation.

The fans can be connected to the supply through a switch, cord or dimmer.

Caution: the fans must not be placed in the shower cabin or in the area where water splashes can spread.

Features VKO 1 fans:


- Made of high quality ABS plastic
- Suitable for operation in ambient temperatures from 40°F to +100°F
- Compatible with 4", 5" and 6" ducts
- Airflow from 53 up to 155 CFM
- Color options: white
- Supply voltage 120V/1/60 Hz.
- 5 years warranty

Modification options:

- Timer- VKO 1
- Ball bearing motor - VKO 1 L
- Fastening bracket - VKO 1 k




Specification

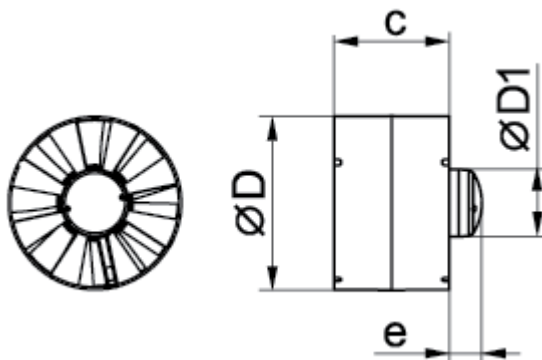

Model	c	D	D1	e
100 VKO1	3 ³ / ₈ "	3 ¹⁵ / ₁₆ "	2 ⁵ / ₁₆ "	1 ¹ / ₈ "
125 VKO1	3 ⁹ / ₁₆ "	4 ¹⁵ / ₁₆ "	2 ⁵ / ₁₆ "	1 ¹ / ₈ "
150 VKO1	3 ¹⁵ / ₁₆ "	5 ⁷ / ₈ "	2 ⁵ / ₁₆ "	1 ¹ / ₈ "

Model	RPM	Sones	Duct Diam.	Max Watts	Max Amps	CFM	Volts
100 VKO1	2805	1,87	4"	13	0,16	53	115
125 VKO1	2150	2,50	5"	16	0,20	85	115
150 VKO1	2230	3,62	6"	33,15	0,41	155	115

Diagramms of Pressure loss

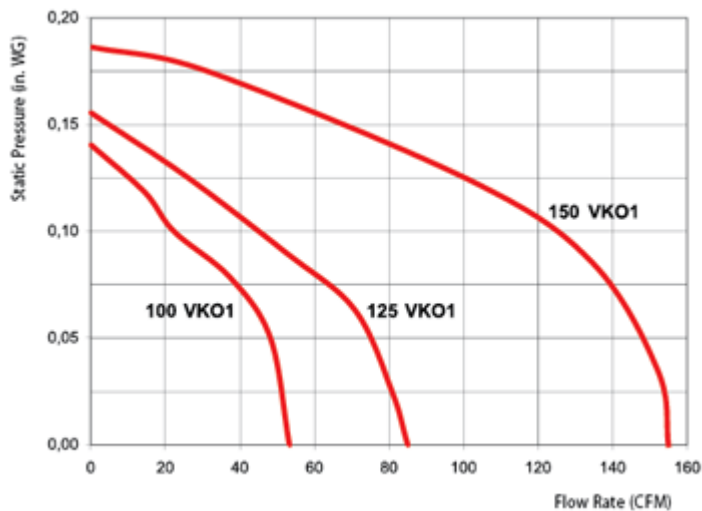

Copyright © 2010 Ventilation System. All rights reserved.

11013 Kenwood Rd, Cincinnati, Ohio 45242. Tel: 1-513-348-3853