


The safe & affordable install

Applicable for residential or light commercial installations

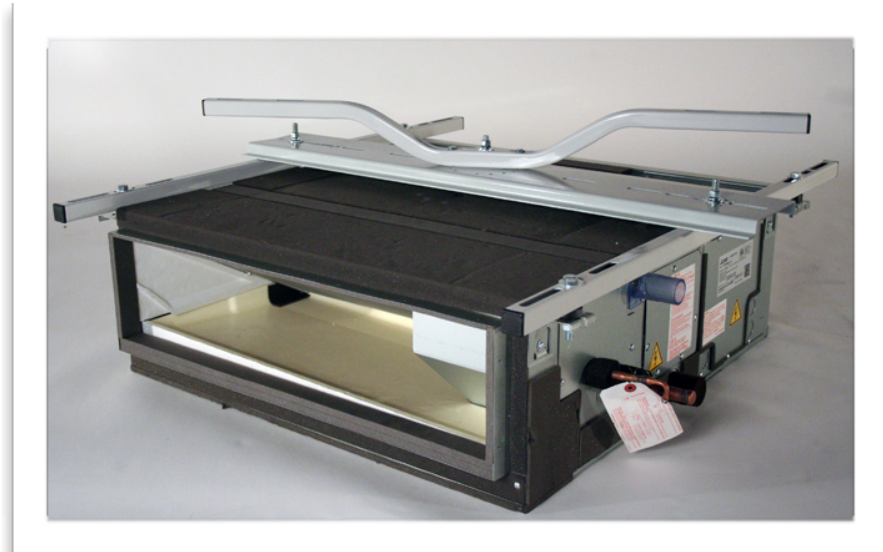

*There is no difference in the functionality of the swivels. The only difference is the physical differences in length and location of slots for mounting.

Check out our compatibility charts to help you find which swivel to use.

Quick Swivel SPECS QSWI3001 & QSWI3002

A Close Up:



The flush mount hanger is slotted to receive a 3/8 lag bolt 16" or 24" on center. It can be attached parallel or perpendicular to the joist.

Our Quick Swivel is made with 14-gauge steel able to hold 200 lbs. The swivel allows for 360 degree rotation for setting the perfect direction of air flow.

*Powder Coated.



The QSWI3001 features 36" connection arms and a 36" spreader plate.

The QSWI3002 features 36" connection arms and a 17" spreader plate.

Installation can be accomplished in minutes because all necessary hardware is provided. Attaching a Quick Swivel to your unit is fast & stress-free.

Quick Swivel provides you with a non-swinging, rotating platform that is quick, safe, stable and affordable. The Quick Swivel can easily be installed in residential or commercial applications. Turn the Swivel in any direction you need then lock it in place, it's that quick.

Patent Pending

Quick-Sling 391 West Water Street Taunton, MA 02780

P:1.800.699.0453 F:1.800.699.0423

www.Quick-Sling.com

*As of 1/1/2015 Quick-Sling offers a 2-year warranty on steel & workmanship; Quick-Sling products are coated in accordance with ASTM D3451-06.